


# 55 X 605 MM 80g 超白哑粉纸 黑白双面印刷 风琴折

前面

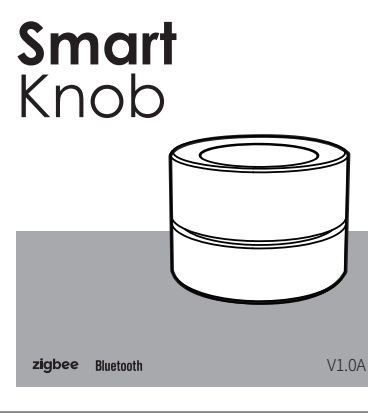

zigbee Bluetooth V1.0A


Quick Guide	
Direct Link Remote Mode	
Paring	Unbinding
Press "RESET" 2 times	Press "RESET" 4 times
Network Mode Remote Mode	
Paring	Setting
Hold "RESET" 6s	In APP
Control Description	
Single Press	On/Off
Long Press >3s	Set color
Rotate	Dimming
Press and Rotate	Set the color temperature

Quick Guide	
Network Mode Scenario Mode	
Paring	Setting
Hold "RESET" 6s	In APP
Quick 3 click button	
Scenario Switch	
Single Press	Setting in APP
Double Clicks	Setting in APP
Long Press	Setting in APP
Rotate to left	Setting in APP
Rotate to right	Setting in APP

### 1 Description

The Wireless Knob Controller is a low-power wireless remote control product designed based on the zigbee 3.0 standard protocols, that designed to control smart bulbs, curtain, fan etc. smart devices. support create scene linkage control over other smart devices on the TUYA platform.

### 2 Dimention




### 3 Specification

Power supply: Battery CR2032 3V DC  
 Communication: Zigbee 3.0\* Bluetooth Low Energy\*  
 Control distance: 50m open area  
 Dimensions: 40 X 40 X 29mm  
 Operating temperature: -10 °C~45 °C  
 Working Humidity: <90%RH  
 Life of battery: 1 years (General use)

\*Available for selected model

### 4 Install the battery

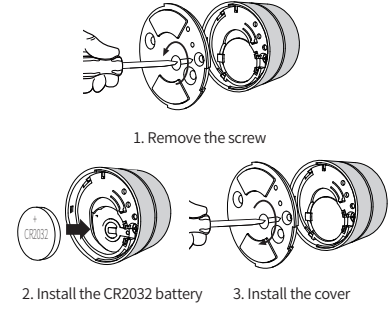

1. Remove the screw
2. Install the CR2032 battery
3. Install the cover

### 5 The remote mode


The remote mode of controller supports that smart lamps with ZLL protocol ( check smart bulb's user manual for more details)

Description:

1. This knob controller has a maximum pairing with 1 bulb, and maximum control 30 smart bulbs;
2. Pairing operate within 3m from the smart bulb;
3. The response of smart bulbs shall be subject to the instructions of the bulb itself.

#### 5.1 The remote mode


##### A. Pairing operation

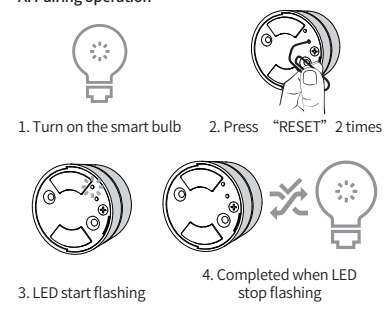

1. Turn on the smart bulb
2. Press "RESET" 2 times
3. LED start flashing
4. Completed when LED stop flashing

#### 5.2 The remote mode


##### B. Unbinding operation

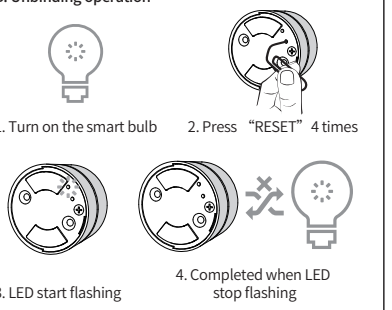

1. Turn on the smart bulb
2. Press "RESET" 4 times
3. LED start flashing
4. Completed when LED stop flashing

#### 5.3 The remote mode

##### C. Control description under remote control mode

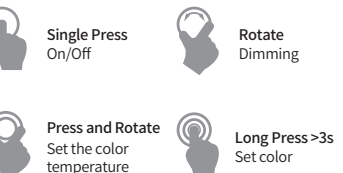


Single Press On/Off, Rotate Dimming, Press and Rotate Set the color temperature, Long Press >3s Set color

Note: The above functions may be different depending on the model of the smart bulb

### 6 Network mode

This product supports TUYA APP network use, More diverse settings waiting for you to find out, come and download the TUYA APP to experience it.




55

后面


### 6.1 Network mode

#### A. Remote operation

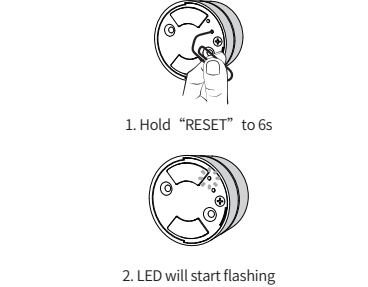


1. Hold "RESET" to 6s
2. LED will start flashing


### 6.2 Network mode

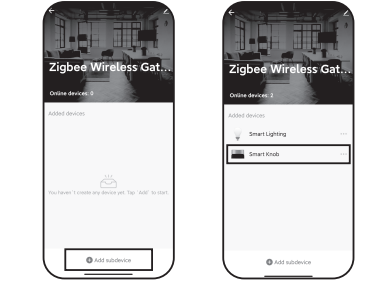

### 6.3 Network mode




### 6.4 Network mode

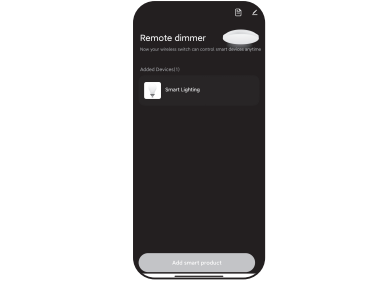

### 6.5 Network mode

#### B. Control description under remote control mode

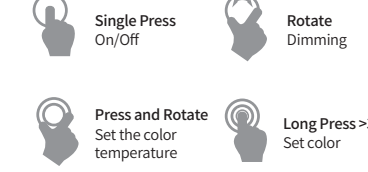


Single Press On/Off, Rotate Dimming, Press and Rotate Set the color temperature, Long Press >3s Set color

Note: The above functions may be different depending on the model of the smart bulb


### 6.6 Operation mode swap

#### C. Scenario setting — Scenario mode swap under the remote mode

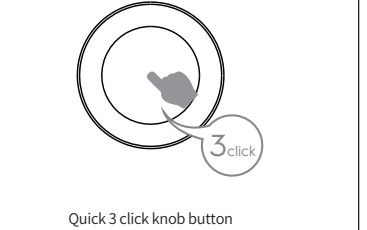


Quick 3 click knob button


### 6.7 Scenario mode




### 6.8 Scenario mode




### 6.9 Scenario mode

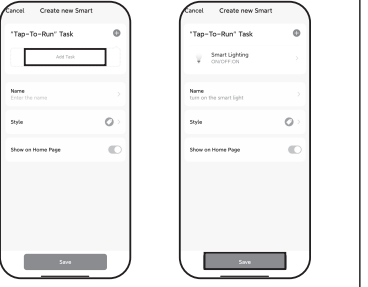

### 6.10 Scenario mode

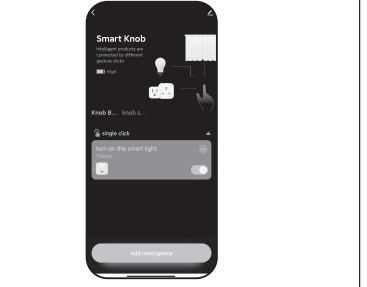

### 7 Reset



Hold "RESET" to 3s